


Product Data

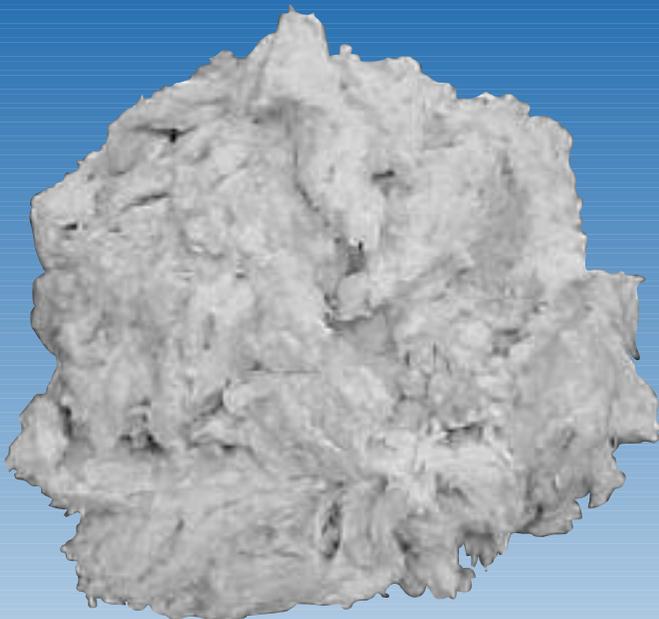

K-Lite™ RT CERAMIC FIBER BULK

- **UL Classified R15863**
- **Completely Inorganic**
- **Excellent Thermal & Acoustical Properties**
- **High Temperature Fill or Packing Material**
- **Lubricated for ease of Handling**

Chemical Resistance

Excellent resistance to chemical attack, except Hydrofluoric acid, Phosphoric acid, and strong alkalis. If saturated with water, thermal and physical properties are restored upon drying.

Physical Properties

Use Limit 2300°F
Melting Point +3200°F
Color White

Packaging Available

10, 30 or 40 lbs. per Carton

Flammability (ASTM E84/UL 723)

Flame Spread 0
Smoke Developed 0

Chemical Analysis (%)

Alumina (Al₂O₃) 47
Silica (SiO₂) 50
Other 3

Thermal Resistance (ASTM C518)

R Value (6PCF) @ 70°F 4.0 per in.

To find out more information on any of ETS Schaefer's innovative heat containment products, please contact our sales department today!

